

BROCADE DCX BACKBONE FAMILY

DATA CENTER

HIGHLIGHTS

- Provides a highly robust 8 Gbps platform in two modular form factors for enterprise data centers supporting open system and System z environments
- Maximizes chassis bandwidth, performance, and port density with the industry's first and only 64-port Fibre Channel blade
- Delivers over four times the performance of competitive offerings to meet data growth and access demands, expand virtualization, and consolidate resources
- Delivers five times the energy efficiency of competitive offerings, enabling data centers to support more server and storage equipment
- Provides a high-density, multiprotocol platform for consolidating server connectivity using emerging CEE and FCoE networking technology
- Secures and protects data against threats and disasters with plug-in blades for data encryption and SAN extension
- Enables logical partitioning of platforms and fabrics into virtual data and management domains without sacrificing performance, scalability, security, or reliability

A Platform for Evolving Data Center Fabrics

Brocade® DCX® Backbones are highly robust network switching platforms that combine breakthrough performance, scalability, and energy efficiency with long-term investment protection. Supporting open systems and System z environments, Brocade DCX Backbones are designed to address the data growth and application demands of evolving enterprise data centers; enable server, SAN, and data center consolidation; and reduce infrastructure and administrative costs.


CHOICE AT THE CORE AND AT THE EDGE

Brocade DCX Backbones are available in two modular form factors. Built for large enterprise networks, the 14U Brocade DCX has eight vertical blade slots to provide up to 512 Fibre Channel ports using Brocade-branded 4 Gbps or 8 Gbps SFPs. Built for midsize networks, the 8U Brocade DCX-4S has four horizontal blade slots to provide up to 256 Fibre Channel ports.

Both models feature ultra-high-speed Inter-Chassis Link (ICL) ports to connect up to three backbones, providing extensive scalability and flexibility at the network core without using any Fibre Channel ports. At the network edge, organizations can utilize Brocade 8 Gbps switches, Brocade 48000 Directors, or—for complete backbone-class capabilities—the Brocade DCX-4S.

HIGHEST PERFORMANCE AND SCALABILITY

Both Brocade DCX models provide 256 Gbps of bandwidth per slot. When combined with unique Brocade local switching capabilities—data traffic within the same port group does not consume slot bandwidth—the

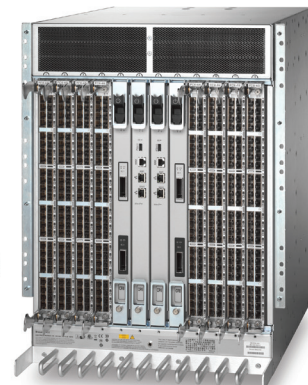

Brocade DCX family provides over *four times* the performance of competitive offerings. Performance capabilities include:

- Brocade DCX:
 - Up to 512 ports (equivalent to 576 with ICLs) at 8 Gbps
 - 4.6 Tbps chassis bandwidth
 - 4.1 Tbps universal ports
 - 512 Gbps ICL bandwidth
 - 256 Gbps bandwidth per slot
- Brocade DCX-4S:
 - Up to 256 ports (equivalent to 288 with ICLs) at 8 Gbps
 - 2.3 Tbps chassis bandwidth
 - 2.0 Tbps universal ports
 - 256 Gbps ICL bandwidth
 - 256 Gbps bandwidth per slot

FLEXIBLE, MULTIPROTOCOL ARCHITECTURE

Brocade DCX Backbones include a Virtual Fabrics feature that enables partitioning of a physical SAN into logical fabrics and isolation by application, business group, customer, or traffic type. Optional Fibre Channel Integrated Routing alleviates the need for special-purpose blades or routers to connect servers and storage in separate fabrics.


The Brocade DCX family supports 1/2/4/8/10 Gbps Fibre Channel and FICON®, FCIP, and IPFC. To consolidate server connectivity using Converged Enhanced Ethernet (CEE) and Fibre Channel over Ethernet (FCoE) in open systems environments, the Brocade FCOE10-24 Blade enables a high-density, end-of-row chassis configuration. Alternatively, Brocade 8000 top-of-rack switches can be connected over Fibre Channel Inter-Switch Links (ISLs) to Brocade DCX Backbones in the network core.

PLUG-IN SECURITY AND DISASTER RECOVERY SOLUTIONS

The Brocade DCX family enables scalable, high-performance, and cost-effective security and disaster recovery solutions through plug-in blades. Brocade FS8-18 Encryption Blades can encrypt data-at-rest at up to 96 Gbps per blade with highly secure 256-bit AES and integrated support for leading key management applications. Brocade FX8-24 Extension Blades extend replication and backup over IP WAN links with the industry's first and only 10 Gbps FCIP connectivity.

Courtesy of

Figure 1. Brocade DCX Backbones provide the core platform of Brocade data center fabrics.

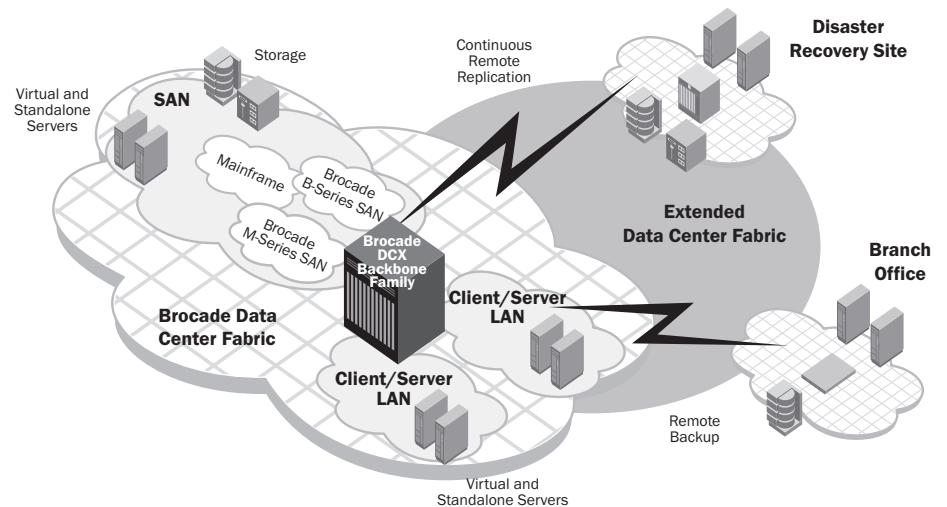

INTELLIGENT MANAGEMENT

To help maximize network performance and reduce operational expense, Brocade Data Center Fabric Manager (DCFM™) provides intuitive system configuration, comprehensive management, and a topology-centric view across Brocade data center solutions.

Brocade DCFM Enterprise supports both backbone models, while Brocade DCFM Professional (bundled) and Brocade DCFM Professional Plus support the Brocade DCX-4S.

BROCADE FOS—POWERED WITH TRAFFIC MONITORING AND ADAPTIVE NETWORKING

Brocade DCX Backbones utilize the powerful Brocade Fabric OS® (FOS), which provides several unique features, including Bottleneck Detection; Top Talkers (part of Advanced Performance Monitoring); and Adaptive Networking, a suite of tools that includes Ingress Rate Limiting, Traffic Isolation, and QoS. Managed through Brocade DCFM or the command line interface, these advanced capabilities help optimize fabric behavior and application performance.

Bottleneck Detection identifies and alerts administrators to ISL or device congestion as well as device latency conditions in the fabric. Left undetected and unresolved, these conditions can cause latency and I/O timeouts, particularly in highly virtualized server environments. Top Talkers measures the top bandwidth-consuming traffic (including by individual virtual machine) in real time over a physical device connection or throughout a network switch. Ingress Rate Limiting restricts data flow from

less-critical hosts at preset bandwidths.

Traffic Isolation dedicates paths in the fabric to specific data flows, enabling predictability and avoiding network congestion. And QoS expedites critical traffic in the event of congestion while keeping all traffic flowing.

ENERGY EFFICIENCY, RELIABILITY, AND INVESTMENT PROTECTION

Brocade DCX Backbones are highly efficient at reducing power consumption, cooling, and the carbon footprint in data centers. While providing unmatched performance and scale, Brocade DCX Backbones use less than one watt per Gbps—making them *five times* more efficient than competitive offerings.

To help minimize downtime costs, the Brocade DCX Backbone family builds upon years of innovation and leverages the core technology of Brocade systems performing at greater than 99.999 percent uptime in the world's most demanding data centers. To maximize return on existing investments, Brocade DCX Backbones connect natively to Brocade B- and M-Series fabrics without disruption.

COMPLETE, BEST-IN-CLASS SOLUTIONS

Through longstanding partner relationships and extensive compatibility testing, Brocade provides organizations with broad choice to implement best-in-class solutions. Moreover, Brocade and its partners offer complete solutions that include cable management, education, support, and services. For more information, contact a Brocade sales partner or visit www.brocade.com.

BROCADE DCX BACKBONE SPECIFICATIONS

Systems Architecture		
Chassis	<p><u>Single chassis:</u> Up to 512 (Brocade DCX) or 256 (Brocade DCX-4S) 8 Gbps universal (E, F, FL, M, EX) Fibre Channel ports using up to eight 16-, 32-, 48-, or 64-port Fibre Channel blades</p> <p><u>Dual-chassis:</u> Up to 1024 (Brocade DCX) or 512 (Brocade DCX-4S) 8 Gbps universal Fibre Channel ports; ICL ports (four per chassis, copper pin) connect up to two Brocade DCX or Brocade DCX-4S chassis (same models or a mix)</p> <p><u>Three chassis:</u> Up to 1536 (Brocade DCX) or 768 (Brocade DCX-4S) 8 Gbps universal Fibre Channel ports; ICL ports (four per chassis, copper pin) connect up to three Brocade DCX or Brocade DCX-4S chassis (same models or a mix)</p>	<p>ICL bandwidth</p> <p>Brocade DCX: 512 Gbps; four ICLs provide the equivalent of 64 8 Gbps ports</p> <p>Brocade DCX-4S: 256 Gbps; four ICLs provide the equivalent of 32 8 Gbps ports</p> <p>Both models: ICL bandwidth is load-balanced using eight 8-port frame-based trunks and DPS</p>
Control processor	Redundant (active/standby) control processor modules	Switch latency
Scalability	Full-fabric architecture of 239 switches	Maximum frame size
Certified maximum	6000 active nodes; 56 switches, 19 hops in Brocade FOS fabrics; 31 switches, 3 hops in Brocade M-EOS fabrics; larger fabrics certified as required	Frame buffers
Special-purpose blades	<p>FCOE10-24 Blade provides CEE/FCoE connectivity for server I/O consolidation (24 10 GbE CEE ports; up to two blades)</p> <p>FS8-18 Encryption Blade provides plug-in encryption of data on disk or tape, supporting industry-standard AES-256 and DataFort-compatible encryption mode (16 8 Gbps Fibre Channel ports; up to four blades; requires DCFM management)</p> <p>FX8-24 Blade provides SAN extension over IP networks (12 8 Gbps Fibre Channel ports with license options providing up to 10 1 GbE ports and up to two 10 GbE ports per blade; up to four blades)</p> <p>FC10-6 Blade provides six 10 Gbps Fibre Channel ports (up to eight blades)</p> <p>FA4-18 Application Blade is integrated with EMC RecoverPoint to provide continuous data protection (16 4 Gbps Fibre Channel ports and two Gigabit Ethernet ports per blade; up to four blades)</p>	<p>Classes of service</p> <p>Class 2, Class 3, Class F (inter-switch frames)</p> <p>Fibre Channel port types</p> <p>FL_Port, F_Port, M_Port (Mirror Port), E_Port, EX_Port (Fibre Channel Integrated Routing); self-discovery based on switch type (U_Port); optional port type control</p>
Performance	<p><u>Fibre Channel:</u> 1.063 Gbps line speed, full duplex; 2.125 Gbps line speed, full duplex; 4.25 Gbps line speed, full duplex; 8.50 Gbps line speed, full duplex; auto sensing of 1, 2, 4, and 8 Gbps port speeds; optionally programmable 1, 2, 4, and 8 Gbps ports; 10.5 Gbps line speed, full duplex.</p> <p><u>CEE:</u> 10.0 Gbps line speed, full duplex.</p>	<p>Data traffic types</p> <p>Fabric switches supporting unicast, multicast (255 groups), and broadcast</p> <p>Media types</p> <p><u>4 Gbps:</u> FC8-16, -32, and -48; FR4-18i; and FA4-18; blades require Brocade hot-pluggable, Small Form-Factor Pluggable (SFP), LC connector; 4 Gbps Short-Wavelength Laser (SWL); 4 Gbps Long-Wavelength Laser (LWL); 4 Gbps Extended Long-Wavelength Laser (ELWL)</p> <p><u>8 Gbps:</u> FC8-16, -32, and -48; FX8-24; and FS8-18 blades require Brocade hot-pluggable SFP+, LC connector; 8 Gbps SWL; 8 Gbps LWL</p> <p><u>8 Gbps:</u> FC8-64 blades require Brocade hot-pluggable mSFP, mSFP LC connector; 8 Gbps SWL only</p> <p><u>10 Gbps:</u> FC10-6 blades utilize non-Brocade hot-pluggable, 10 Gbps Small Form-Factor Pluggable (XFP), LC connector; 10 Gbps SWL; 10 Gbps LWL</p> <p>Fibre Channel distance subject to fiber-optic cable and port speed</p> <p>CEE media type: Hot-pluggable, Brocade 10 GbE SFP+ supports any combination of Short-Reach (SR) and Long-Reach (LR) optical transceivers; Brocade copper Twinax cables of one, three, or five meters</p>
ISL Trunking	Frame-based trunking with up to eight 8 Gbps ports per ISL trunk; up to 64 Gbps per ISL trunk Exchange-based load balancing across ISLs with DPS included in Fabric OS	USB
Chassis bandwidth	<p>Brocade DCX: 4.6 Tbps per chassis (512 ports × 8 Gbps data rate + 512 Gbps ICL bandwidth)</p> <p>Brocade DCX-4S: 2.3 Tbps per chassis (256 ports × 8 Gbps data rate + 256 Gbps ICL bandwidth)</p>	Fabric services
Slot bandwidth	256 Gbps (data rate)	<p>Advanced Performance Monitoring (including Top Talkers); Adaptive Networking (Ingress Rate Limiting, Traffic Isolation, QoS); BB credit recovery; Bottleneck Detection; Brocade Advanced Zoning (default zoning, port/WWN zoning, broadcast zoning); Dynamic Path Selection (DPS); Extended Fabrics; Fabric Watch; FDMI; Frame Redirection; FSPF; Integrated Routing; IPoFC; ISL Trunking; Management Server; N_Port Trunking; NPIV; NTP v3; Port Fencing; Registered State Change Notification (RSCN); Reliable Commit Service (RCS); Simple Name Server (SNS); Virtual Fabrics (Logical Switch, Logical Fabric)</p>
Local switching bandwidth	<p>128 Gbps for FC8-16: 16 ports × 8 Gbps (data rate)</p> <p>256 Gbps for FC8-32: 32 ports × 8 Gbps (data rate)</p> <p>384 Gbps for FC8-48: 48 ports × 8 Gbps (data rate)</p> <p>512 Gbps for FC8-64: 64 ports × 8 Gbps (data rate)</p>	<p>Extension</p> <p>Supports DWDM, CWDM, and FC-SONET devices; FCIP, data compression, Fast Write, read/write Tape Pipelining, QoS, BB credit recovery</p> <p>FICON</p> <p>FICON cascading (FOS: Brocade DCX, DCX-4S; and M-EOS: Brocade DCX only); support for lossless DLS with port-based and exchange-based routing; FICON CUP; Advanced Accelerator for FICON (FICON Global Mirror and XRC emulation and read/write Tape Pipelining). The FC8-64 blade does not support FICON.</p>

Courtesy of

BROCADE DCX BACKBONE SPECIFICATIONS (CONTINUED)

High Availability	
Architecture	Passive backplane; separate and redundant control processor and core switching blades (two of each); redundant WWN cards
Chassis power	Two 2000 W AC power supply modules (100 to 240 V auto-sensing), 2N redundancy; Brocade DCX supports two additional power modules
Cooling	Brocade DCX: Three blower assembly modules (two required for operation) Brocade DCX-4S: Two blower assembly modules (one required for operation)
Solution availability	Designed to provide 99.999 percent uptime capabilities; hot-pluggable redundant power supplies, fans, WWN cards, processors, core switching, port blades, and optics; online diagnostics; non-disruptive firmware download and activation

Management	
Management	HTTP, SNMP v1/v3 (FE MIB, FC Management MIB), Telnet; Auditing, Syslog; Brocade Advanced Web Tools, Brocade Fabric Watch; Brocade Data Center Fabric Manager (DCFM) Enterprise (Brocade DCX, DCX-4S) or DCFM Professional/Professional Plus (Brocade DCX-4S only), Brocade Fabric Manager (optional, FOS environments only), Brocade EFCM 9.x (optional), command line interface; SMI-S compliant; Administrative Domains; trial licenses for add-on capabilities
Security	DH-CHAP (between switches and end devices), FIPS 140-2 L2-compliant, HTTPS, IPsec, IP filtering, LDAP, Port Binding, RADIUS, Role-Based Access Control (RBAC), Secure Copy (SCP), Secure RPC, SSH v2, SSL, Switch Binding, Trusted Switch
Management access	10/100/1000 Ethernet (RJ-45) per control processor, in-band over Fibre Channel; serial port (RJ-45) and one USB per control processor module; call-home integration enabled through Brocade DCFM, EFCM, and Fabric Manager
Diagnostics	POST and embedded online/offline diagnostics, including RAStace logging, environmental monitoring, non-disruptive daemon restart, FCPing and Pathinfo (FC traceroute), port mirroring (SPAN port), and Rolling Reboot Detection (RRD)

Mechanical Specifications	
Enclosure	Rear panel-to-door airflow; Brocade DCX-4S ships with 1U exhaust shelf
Mounting	Rack-mountable in a standard 19-inch EIA cabinet

Size	Brocade DCX Width: 43.74 cm (17.22 in) Height: 61.24 cm (24.11 in, 14U) Depth (without door): 61.19 cm (24.09 in) Depth (with door): 73.20 cm (28.82 in)
	Brocade DCX-4S Width: 43.74 cm (17.22 in) Height: 35.00 cm (13.78 in, 8U) plus 4.37 cm exhaust shelf (1.72 in, 1U) Depth without door: 61.19 cm (24.09 in) Depth with door: 73.20 cm (28.82 in)
System weight	Brocade DCX 103.50 kg (228.20 lb) for 512-port configuration fully populated; 39.55 kg (82.20 lb) for chassis
	Brocade DCX-4S 68.04 kg (150.00 lb) for 256-port configuration fully populated; 25.76 kg (56.80 lb) for chassis

Environment	
Temperature	Operating: 0° C to 40° C (32° F to 104° F) Non-operating: -25° C to 70° C (-13° F to 158° F)
Humidity	Operating: 20% to 85% RH non-condensing at 40° C (104° F) Non-operating and storage (non-condensing): 10% to 93% at 70° C (158° F)
Altitude	Up to 3000 meters (9842 feet)
Shock	Operating: 20 g, 6 ms, half sine Non-operating: 33 g, 11 ms, half sine
Vibration	Operating: 0.5 g p-p, 5 to 500 to 5 Hz Non-operating: 2.0 g p-p, 5 to 500 to 5 Hz
Heat dissipation	Brocade DCX Min: 16-port configuration of 504 W, 1720 BTU/hr Max: 512-port configuration of 1528 W, 5216 BTU/hr
	Brocade DCX-4S Min: 16-port configuration of 383 W, 1306 BTU/hr Max: 256-port configuration of 862 W, 2943 BTU/hr
CO ₂ emissions	Brocade DCX 5.6 metric tonnes per year (with 512 ports at 0.42 kg/kWh) 1.4 kg per Gbps per year
	Brocade DCX-4S 3.2 metric tonnes per year (with 256 ports at 0.42 kg/kWh) 1.5 kg per Gbps per year

Power		
Supported power range	Voltage	Range: 85 to 264 VAC Auto-volt Nominal: 100 to 240 VAC
	Power	85 to 132 VAC: 1000 W 180 to 264 VAC: 2000 W
In-rush current	20 Amps maximum, peak	
Frequency	47 to 63 Hz	

For information about supported SAN standards, visit www.brocade.com/sanstandards

For information about switch and device interoperability, visit www.brocade.com/interoperability

For information about hardware regulatory compliance, visit www.brocade.com/regulatorycompliance

Corporate Headquarters

San Jose, CA USA
T: +1-408-333-8000
info@brocade.com

European Headquarters

Geneva, Switzerland
T: +41-22-799-56-40
emea-info@brocade.com

Asia Pacific Headquarters

Singapore
T: +65-6538-4700
apac-info@brocade.com

© 2010 Brocade Communications Systems, Inc. All Rights Reserved. 04/10 GA-DS-961-09

Brocade, the B-wing symbol, BigIron, DCX, Fabric OS, FastIron, IronView, NetIron, SAN Health, ServerIron, and Turbolron are registered trademarks, and Brocade Assurance, DCFM, Extraordinary Networks, and Brocade NET Health are trademarks of Brocade Communications Systems, Inc., in the United States and/or in other countries. Other brands, products, or service names mentioned are or may be trademarks or service marks of their respective owners.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.



BROCADE