

# BROCADE 6510 SWITCH

## DATA CENTER

### HIGHLIGHTS

- Provides exceptional price/performance value, combining flexibility, simplicity, and enterprise-class functionality in a 48-port switch for virtualized data centers and private cloud architectures
- Enables fast, easy, and cost-effective scaling from 24 to 48 ports using Ports on Demand (PoD) capabilities
- Simplifies deployment with the Brocade EZSwitchSetup wizard
- Accelerates deployment and troubleshooting time with Dynamic Fabric Provisioning (DFP), critical monitoring, and advanced diagnostic features
- Maximizes availability with redundant, hot-pluggable components and non-disruptive software upgrades
- Simplifies server connectivity and SAN scalability by offering dual functionality as either a full-fabric SAN switch or an NPIV-enabled Brocade Access Gateway
- Simplifies and centralizes management through Brocade Network Advisor, reducing operational costs and complexity

The Brocade One™ strategy helps simplify networking infrastructures through innovative technologies and solutions. The Brocade 6510 Switch supports this strategy by delivering industry-leading reliability within a flexible, cost-effective, and easy-to-use 1U form factor.

## Flexible, Easy-to-Use Enterprise-Class SAN Switch for Private Cloud Storage

To keep pace with growing business demands, data centers are transitioning to highly virtualized, private cloud storage environments. This approach enables organizations to consolidate and simplify their IT resources, resulting in increased business agility and lower capital and operating expenses. But virtualization is not without its challenges. Data centers must keep up with the explosive data growth and dynamic changes driven by virtualized workloads. Selecting the right network is key to realizing the full benefits of these cloud-based architectures.

The Brocade® 6510 Switch meets the demands of hyper-scale, private cloud storage environments by delivering market-

leading 16 Gbps Fibre Channel technology and capabilities that support highly virtualized environments. Designed to enable maximum flexibility and reliability, the Brocade 6510 is configurable in 24, 36, or 48 ports and supports 2, 4, 8, 10, or 16 Gbps speeds in an efficiently designed 1U package.

A simplified deployment process and a point-and-click user interface make the Brocade 6510 both powerful and easy to use. The Brocade 6510 offers low-cost access to industry-leading Storage Area Network (SAN) technology while providing “pay-as-you-grow” scalability to meet the needs of an evolving storage environment.



# BROCADE

## ACCELERATING FABRIC DEPLOYMENT WITH DIAGNOSTIC PORTS

Diagnostic Ports (D\_Ports) are a new port type that enables administrators to quickly identify and isolate optics and cable problems, reducing fabric deployment and diagnostic times. Organizations also can use D\_Ports to run a variety of tests through Brocade Network Advisor or Command Line Interface (CLI) to test ports, SFPs, and cables for faults, latency, and distance.

## SIMPLIFYING SERVER DEPLOYMENT WITH DYNAMIC FABRIC PROVISIONING

Dynamic Fabric Provisioning (DFP) allows organizations to eliminate fabric reconfiguration when adding or replacing servers through the virtualization of host World Wide Names (WWNs). It combines Brocade switch and adapter technology to reduce or eliminate the need to modify zoning or Logical Unit Number (LUN) masking. In addition, DFP enables pre-provisioning of virtual WWNs, helping organizations eliminate time-consuming steps when deploying new equipment or moving devices within a switch.

## EXCEPTIONAL PRICE/PERFORMANCE FOR GROWING SAN WORKLOADS

The Brocade 6510 delivers exceptional price/performance for growing SAN workloads through a combination of market-leading throughput and an affordable switch form factor. The 48 ports produce an aggregate 768 Gbps full-duplex throughput; any eight ports can be trunked for 128 Gbps Inter-Switch Links (ISLs). Exchange-based Dynamic Path Selection (DPS) optimizes fabric-wide performance and load balancing by automatically routing data to the most efficient available path in the fabric (see Figure 1). It augments ISL trunking to provide more effective load balancing in certain configurations.

Moreover, a 24-port base configuration, easy administration, 1U footprint, and low-energy consumption—0.14 watts per Gbps and 2.3 watts per port—provide a low Total Cost of Ownership (TCO). Enterprise-class capabilities combined with a low TCO yield 40 percent higher performance compared to 10 Gigabit Ethernet (GbE) alternatives at a similar cost.

## INDUSTRY-LEADING TECHNOLOGY THAT IS FLEXIBLE, SIMPLE, AND EASY TO USE

The Brocade 6510 delivers industry-leading SAN technology within a flexible, simple, and easy-to-use solution. The base configuration includes 24 ports, with up to 48 ports on demand. In addition to providing best-in-class scalability, the Brocade 6510 is easy to deploy with the Brocade EZSwitchSetup wizard and new “D\_Port” feature, which simplifies setup. For maximum flexibility, the switch also features a 1U case less than 18 inches deep and dual-direction airflow options to support the latest hot aisle/cold aisle configurations.

## A BUILDING BLOCK FOR VIRTUALIZED, PRIVATE CLOUD STORAGE

The Brocade 6510 provides a critical building block for today’s highly virtualized, private cloud storage environments. It simplifies server virtualization and Virtual Desktop Infrastructure (VDI) management while meeting the high-throughput demands of Solid State Disks (SSDs). The Brocade 6510 also supports multi-tenancy in cloud environments through Virtual Fabrics, Quality of Service (QoS), and fabric-based zoning features.

The Brocade 6510 enables secure metro extension to virtual private or hybrid clouds with 10 Gbps Dense Wavelength Division Multiplexing (DWDM) link support, as well as in-flight encryption and data compression. The switch also features on-board data security and acceleration, minimizing the need for separate acceleration appliances to support distance extension. Internal fault-tolerant and enterprise-class RAS features help minimize downtime to support mission-critical cloud environments.


## BROCADE ACCESS GATEWAY MODE

The Brocade 6510 can be deployed as a full-fabric switch or as a Brocade Access Gateway, which simplifies fabric topologies and heterogeneous fabric connectivity (the default mode setting is a switch). Access Gateway mode utilizes N\_Port ID Virtualization (NPIV) switch standards to present physical and virtual servers directly to the core of SAN fabrics. This makes it transparent to the SAN fabric, greatly reducing management of the network edge. The Brocade 6510 in Access Gateway mode\* can connect servers to NPIV-enabled Brocade B-Series, Brocade M-Series, or other SAN fabrics.

\* Note: Access Gateway mode for the Brocade 6510 is supported only in 48-port configurations.

Figure 1.

Dynamic Path Selection (DPS) augments ISL Trunking to route data efficiently between multiple trunk groups.

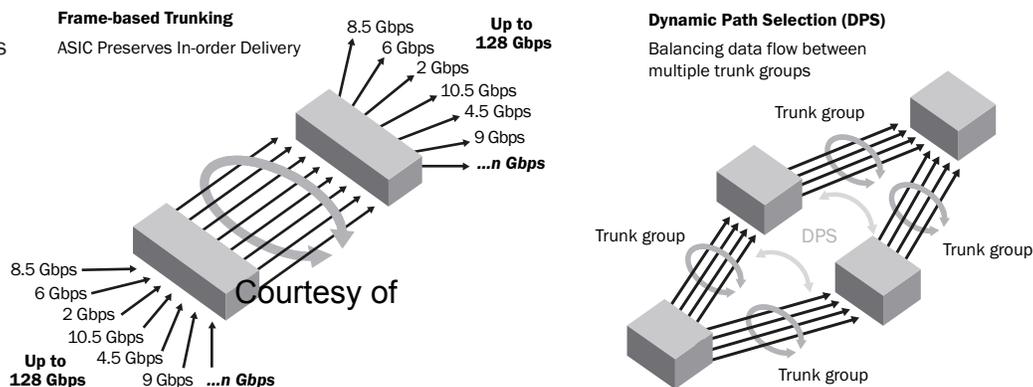

Organizations can easily enable Access Gateway mode via Brocade Network Advisor or a CLI. Key benefits of Access Gateway mode include:

- Improved scalability for large or rapidly growing server and virtual server environments
- Reduced management of the network edge, since Access Gateway does not have a domain identity and appears transparent to the core fabric
- Support for heterogeneous SAN configurations without reduced functionality for server connectivity

### ENTERPRISE-CLASS FEATURES IN A HIGH PERFORMANCE SWITCH

The Brocade 6510 features advanced monitoring, diagnostics, and RAS capabilities to maximize availability,

optimize performance, and simplify administration. These enterprise-class features include:

- Critical diagnostic and monitoring capabilities to help ensure early problem detection and recovery
- Non-intrusive and non-disruptive monitoring on every port to provide a comprehensive end-to-end view of the entire fabric
- Forward Error Correction (FEC) to recover from bit errors in ISLs, enhancing transmission reliability and performance
- Additional buffers to overcome performance degradation and congestion due to buffer credit loss
- Real-time bandwidth consumption by hosts/applications on ISLs to easily identify hot spots and potential network congestion

### BROCADE GLOBAL SERVICES

Brocade Global Services has the expertise to help organizations build scalable, efficient cloud infrastructures. Leveraging 15 years of expertise in storage, networking, and virtualization, Brocade Global Services delivers world-class professional services, technical support, network monitoring services, and education, enabling organizations to maximize their Brocade investments, accelerate new technology deployments, and optimize the performance of networking infrastructures.

### MAXIMIZING INVESTMENTS

To help optimize technology investments, Brocade and its partners offer complete solutions that include professional services, technical support, and education. For more information, contact a Brocade sales partner or visit [www.brocade.com](http://www.brocade.com).

## BROCADE 6510 SPECIFICATIONS

Systems Architecture		Data traffic types	Fabric switches supporting unicast
Fibre Channel ports	Switch mode (default): 24-, 36-, and 48-port configurations (12-port increments through Ports on Demand [PoD] licenses); universal (E, F, M, D, EX) ports Brocade Access Gateway default port mapping: 40 F_Ports, 8 N_Ports	Media types	Hot-pluggable, industry-standard Small Form-Factor Pluggable (SFP+), LC connector; Short-Wavelength (SWL), Long-Wavelength (LWL); Extended Long-Wavelength (ELWL); distance depends on fiber optic cable and port speed. Supports SFP+ (2, 4, 8, 10, 16 Gbps) optical transceivers.
Scalability	Full fabric architecture with a maximum of 239 switches	USB	One USB port for system log file downloads or firmware upgrades
Certified maximum	6000 active nodes; 56 switches, 19 hops in Brocade Fabric OS® fabrics; 31 switches, three hops in Brocade M-EOS fabrics; larger fabrics certified as required	Fabric services	Brocade Advanced Performance Monitoring (APM) (including Top Talkers for E_Ports, F_Ports, and Fabric mode); Brocade Adaptive Networking (Ingress Rate Limiting, Traffic Isolation, QoS); Bottleneck Detection; Brocade Advanced Zoning (default zoning, port/WWN zoning, broadcast zoning); Dynamic Fabric Provisioning (DFP); Dynamic Path Selection (DPS); Brocade Extended Fabrics; Enhanced BB credit recovery; Brocade Fabric Watch; FDMI; Frame Redirection; Frame-based Trunking; FSPF; Integrated Routing; IPoFC; Brocade ISL Trunking; Management Server; NPIV; NTP v3; Port Fencing; Registered State Change Notification (RSCN); Reliable Commit Service (RCS); Server Application Optimization (SAO); Simple Name Server (SNS); Virtual Fabrics (Logical Switch, Logical Fabric)
Performance	Auto-sensing of 2, 4, 8, and 16 Gbps port speeds; 10 Gbps and optionally programmable to fixed port speed.	<i>Note: Some fabric services do not apply or are unavailable in Brocade Access Gateway mode.</i>	
ISL trunking	Frame-based trunking with up to eight 16 Gbps ports per ISL trunk; up to 128 Gbps per ISL trunk. Exchange-based load balancing across ISLs with DPS included in Brocade Fabric OS. There is no limit to how many trunk groups can be configured in the switch.	Extension	Fibre Channel, in-flight compression (Brocade LZ0) and encryption (AES-GCM-256); integrated 10 Gbps Fibre Channel for DWDM MAN connectivity
Aggregate bandwidth	768 Gbps end-to-end full duplex		
Maximum fabric latency	Latency for locally switched ports is 700 ns; encryption/compression is 5.5 µsec per node; Forward Error Correction (FEC) adds 400 ns between E_Ports (enabled by default).		
Maximum frame size	2112 byte payload		
Frame buffers	8192 dynamically allocated		
Classes of service	Class 2, Class 3, Class F (inter-switch frames)		
Port types	D_Port (Diagnostic Port), E_Port, EX_Port, F_Port, M_Port (Mirror Port); self-discovery based on switch type (U_Port); optional port type control  Brocade Access Gateway mode: F_Port and NPIV-enabled N_Port		

Courtesy of

**BROCADE 6510 SPECIFICATIONS (CONTINUED)**

Management	
Supported management software	HTTP, SNMP v1/v3 (FE MIB, FC Management MIB), SSH; Auditing, Syslog; Brocade Advanced Web Tools, APM, Brocade Fabric Watch; Brocade Network Advisor SAN Enterprise or Brocade Network Advisor SAN Professional/Professional Plus; Command Line Interface (CLI); SMI-S compliant; Administrative Domains; trial licenses for add-on capabilities
Security	AES-GCM-256 encryption on ISLs; DH-CHAP (between switches and end devices), FCAP switch authentication; FIPS 140-2 L2-compliant, HTTPS, IPsec, IP filtering, LDAP with IPv6, Port Binding, RADIUS, User-defined Role-Based Access Control (RBAC), Secure Copy (SCP), Secure RPC, SFTP, SSH v2, SSL, Switch Binding, Trusted Switch
Management access	10/100 Mbps Ethernet (RJ-45), in-band over Fibre Channel, serial port (RJ-45), and one USB port
Diagnostics	D_Port offline diagnostics, including electrical/optical loopback, link traffic/latency/distance; POST and embedded online/offline diagnostics, including environmental monitoring, FCping and Pathinfo (FC traceroute), frame viewer, non-disruptive daemon restart, port mirroring, optics health monitoring, power monitoring, RAStrace logging, and Rolling Reboot Detection (RRD)
Mechanical	
Enclosure	Front-to-back airflow; power from back, 1U Back-to-front airflow; power from back, 1U
Size	Width: 437.64 mm (17.23 in.) Height: 43.18 mm (1.7 in.) Depth: 443.23 mm (17.45 in.)
System weight	9.16 kg (20.20 lb) with two power supply FRUs, without transceivers

Environment	
Operating environment	Temperature: 0° to 40°C/32°F to 104°F Humidity: 10% to 85% (non-condensing)
Non-operating environment	Temperature: -25° to 70°C/-13°F to 158°F Humidity: 10% to 90% (non-condensing)
Operating altitude	Up to 3000 m (9842 ft)
Storage altitude	Up to 12 km (39,370 ft)
Shock	Operating: Up to 20 G, 6 ms half-sine Non-operating: Half sine, 33 G 11 ms, 3/eg axis
Vibration	Operating: 0.5 g sine, 0.4 grms random, 5 to 500 Hz Non-operating: 2.0 g sine, 1.1 grms random, 5 to 500 Hz
Heat dissipation	48 ports at 338 BTU/hr
Power	
Power supply	Dual, hot-swappable redundant power supplies with integrated system cooling fans
AC input	85 V to 264 V ~5 A to 2.5 A
Input line frequency	47 Hz to 63 Hz
Power consumption	110 watts with all 48 ports populated with 16 Gbps SWL optics 72 watts for empty chassis with no optics

For information about supported SAN standards, visit [www.brocade.com/sanstandards](http://www.brocade.com/sanstandards).

For information about switch and device interoperability, visit [www.brocade.com/interoperability](http://www.brocade.com/interoperability).

For information about hardware regulatory compliance, visit [www.brocade.com/regulatorycompliance](http://www.brocade.com/regulatorycompliance).

**Corporate Headquarters**

San Jose, CA USA  
T: +1-408-333-8000  
info@brocade.com

**European Headquarters**

Geneva, Switzerland  
T: +41-22-799-56-40  
emea-info@brocade.com

**Asia Pacific Headquarters**

Singapore  
T: +65-6538-4700  
apac-info@brocade.com

© 2012 Brocade Communications Systems, Inc. All Rights Reserved. 02/12 GA-DS-1565-02

Brocade, Brocade Assurance, the B-wing symbol, DCX, Fabric OS, MLX, SAN Health, VCS, and VDX are registered trademarks, and AnyIO, Brocade One, CloudPlex, Effortless Networking, ICX, NET Health, OpenScript, and The Effortless Network are trademarks of Brocade Communications Systems, Inc., in the United States and/or in other countries. Other brands, products, or service names mentioned may be trademarks of their respective owners.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.

Courtesy of



**BROCADE**